


Frame extension elements for wooden and wood-metal lifting sliding doors Moisture-resistant

Product description

The Frinorm moisture-resistant frame extension elements for wooden and wood-metal lifting sliding doors are especially suited for high demands on moisture resistance as well as high thermal insulation requirements. They are available with a plywood panel AW100, untreated, plywood panel AW100 with primer foil or real wood veneer in all types of wood. Expanded polystyrene rigid foam (EPS), 15 kg/m³, is used for thermal insulation. The frame extension elements are fabricated with a circumferential plywood edge band. Special edge bands can be inset according to your requirements. All possible CNC edge profile work is performed on all sides according to your profile specifications. Special CNC processing, such as cut-outs, ventilation slots or surface grooves, is also possible.

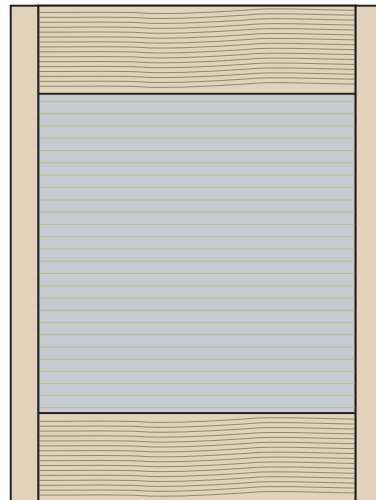

Range and design

Type	Cover panel and surface	Thermal insulation	Edge band	U-values	dB-values
Untreated	Both sides 12 mm, plywood panel AW100, untreated	Expanded polystyrene rigid foam (EPS), 15 kg/m ³	Plywood IW67, circumferential (Special edge bands are inset according to your requirements)	Thermal transmittance coefficients up to 0.1 W/m ² K (For U-values, see table on technical data sheet)	Airborne sound insulation values up to 26 dB (For dB-values, see table on technical data sheet or on download of test reports)
Primer foil	Both sides 9 mm, plywood panel AW100, coated with white primer foil				
Veneered	Both sides 12 mm, plywood panel AW100, covered with 1 mm real wood veneer; all types of real wood veneers available: spruce pine, pine, larch, fir, oak, etc.; veneer quality A/B (inside A/outside B) or A/A (inside A/outside A)				

Thicknesses

Thicknesses from 113 to 220 mm can be produced.

For thicknesses below 113 mm, see frame extension elements for wooden and wood-metal windows.

Formats

All formats from 500 × 95 mm to 3588 × 1294 mm can be produced.

CNC edge milling

All possible CNC edge profile work is performed on all sides according to your profile specifications. Special CNC processing, such as cut-outs, and surface finishing, such as ventilation slots or surface grooves, are also possible.

Consultation

For more information please refer to the technical data sheets.

Our technical consultants are at your service for all questions.