


Infill for plastic windows

Sound insulation

Product description

The Frinorm infills are especially suitable for use as a glass substitute in plastic windows. They are available in hard PVC in different shades of white (Veka, Kömmerling, Finstral or Internorm) or HPL with decorative foil (all colours). For sound insulation, the frame extension elements are fabricated with heavy bitumen foil. Glass wool, 20 kg/m³, is used for thermal insulation. The infills are fabricated with a circumferential spruce edge band. Special edge bands are inset according to your requirements. All possible CNC edge profile work is performed on all sides according to your profile specifications. Special CNC processing like cut-outs, round and segment arches, ventilation slots or surface grooves are also possible.

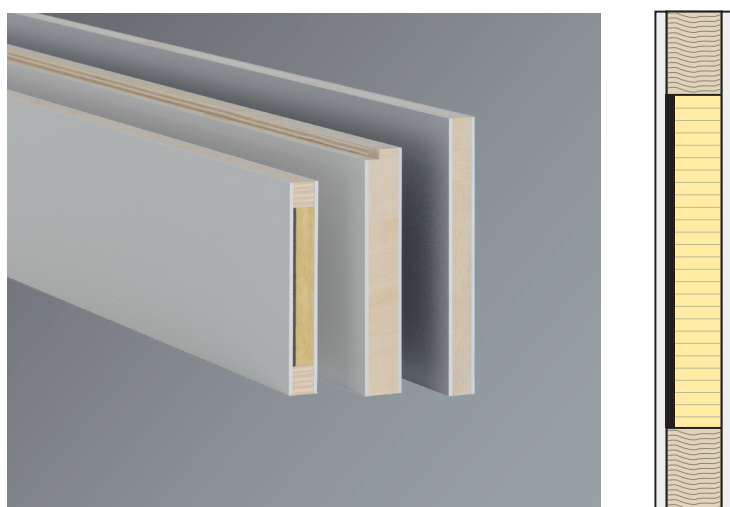

Range and design

Type	Cover panel and surface	Thermal insulation	Edge band	U-values	dB-values
PVC, white	Both sides 4 mm, hard PVC, colour: Veka, Kömmerling, Finstral or Internorm	Glass wool, 20 kg/m ³	Plywood IW67, circumferential	Thermal transmittance coefficients up to 1.0 W/m ² K (For U-values, see table on technical data sheet)	Airborne sound insulation values of up to 38 dB (For dB-values, see table on technical data sheet or on download of test reports)
HPL, decorative foil	Both sides 4 mm, HPL, coated with decorative foil; all colours available				

Thicknesses

Thicknesses from 25 to 39 mm can be produced.

For thicknesses of 40 mm and more, see window frame extension elements for plastic windows.

Formats

Hard PVC, white: all formats from 500 × 95 mm up to 3588 × 1294 mm can be manufactured.

HPL, decorative foil: all formats from 500 × 95 mm up to 2988 × 1294 mm can be manufactured.

CNC edge milling

All possible CNC edge profile work is performed on all sides according to your profile specifications. Special CNC processing like cut-outs, round and segment arches, ventilation slots or surface grooves are also possible.

Consultation

For more information please refer to the technical data sheets.
Our technical consultants are at your service for all questions.