
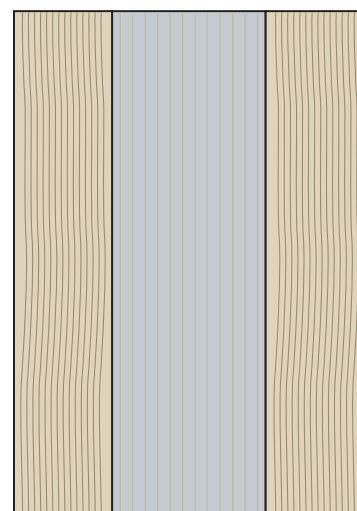
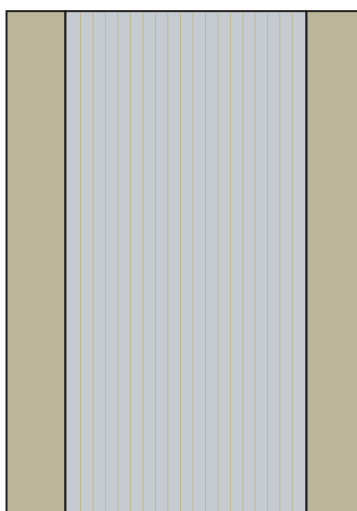


Substructure elements for wooden and wood-metal lifting sliding doors

Product description

Frinorm plinth elements for wooden and wood-metal lifting sliding doors for floors are especially suited for a wide range of demands, such as thermal protection and a high load capacity. They are available with a mildew- and rot-resistant polyurethane panel or a plywood panel IW67. Intensely expanded polystyrene rigid foam (EPS perimeter), 30 kg/m³, is used for thermal insulation. All possible CNC edge profile work is performed according to your threshold profile.

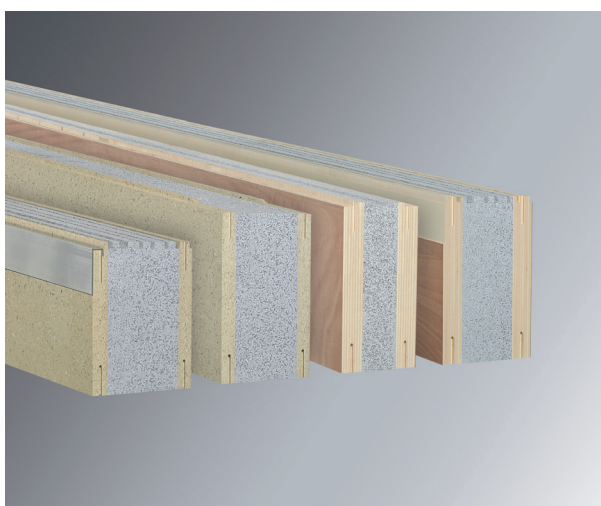

Range and design

Type	Cover panel and surface	Thermal insulation	U-values
Polyurethane	Both sides 26 mm, polyurethane panel, mildew- and rot-resistant	Intensely expanded polystyrene rigid foam (EPS perimeter), 30 kg/m ³	Thermal transmittance coefficients up to 0.1 W/m ² K (For U-values, see table on technical data sheet)
Plywood	Both sides 40 mm, plywood panel IW67		

Thicknesses

Thicknesses from 100 to 240 mm can be produced.

For thicknesses below 100 mm, see substructure elements for wooden balcony doors.

Formats

Polyurethane: all formats from 500 × 95 mm to 3588 × 1294 mm can be produced.

Plywood: all formats from 500 × 95 mm to 2510 × 1294 mm can be produced.

Plinth elements that are longer than 2510 or 3588 mm are shaped with grooves for dovetail joints.

CNC edge milling

All possible CNC edge profile work is performed according to your threshold profile.

Consultation

For more information please refer to the technical data sheets.

Our technical consultants are at your service for all questions.

Frinorm AG, Wärmedämmelemente

Föhrenweg 12, FL-9496 Balzers, phone 00423 384 23 66, fax 00423 384 23 35, www.frinorm.com, info@frinorm.com