


## Frame extension elements for aluminium lifting sliding doors Standard

### Product description

The Frinorm standard frame extension elements for aluminium lifting sliding doors are suited for high thermal insulation requirements. The aluminium shell is purely mechanically mounted. Due to the high expansion coefficient of the aluminium, the aluminium shell is only clamped into the guide groove. The aluminium shell is available for one or both sides from Frinorm or on site. All RAL and NCS colours are available. The standard frame extension elements are available with chipboard P5, E1, untreated, or plywood panel AW100. Expanded polystyrene rigid foam (EPS perimeter), 15 kg/m<sup>3</sup>, is used for thermal insulation. The frame extension elements are fabricated with a circumferential plywood edge band. Special edge bands can be inset according to your requirements. All possible CNC edge profile work is performed on all sides according to your profile specifications.

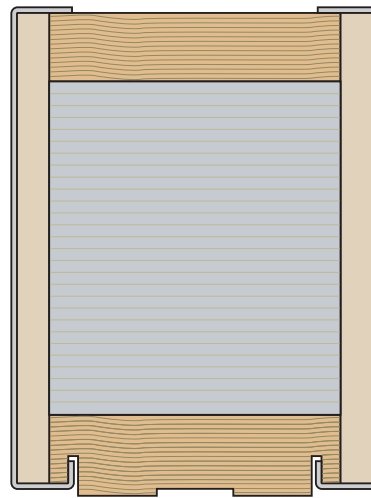

### Range and design

Type	Cover panel and surface	Thermal insulation	Edge band	U-values	dB-values
Chipboard	Both sides 10 mm, chipboard P5, E1, untreated	Expanded polystyrene rigid foam (EPS), 15 kg/m <sup>3</sup>	Plywood IW67, circumferential	Thermal transmittance coefficients up to 0.1 W/m <sup>2</sup> K	Airborne sound insulation values of up to 26 dB
Plywood	Both sides 12 mm, plywood panel, AW100, untreated	Aluminium shell on one side, internal vapour barrier required	(Special edge bands are inset according to your requirements)	(For U-values, see table on technical data sheet)	(For dB-values, see table on technical data sheet or on download of test reports)

### Thicknesses

Thicknesses from 100 to 220 mm can be produced.

For thicknesses below 100 mm, see frame extension elements for aluminium windows.

### Formats

All formats from 500 × 95 mm to 3588 × 1294 mm can be produced.

**CNC edge milling**

All possible CNC edge profile work is performed on all sides according to your profile specifications.

**Consultation**

For more information please refer to the technical data sheets.

Our technical consultants are at your service for all questions.